

# HONDA MARINE

## Honda BF60 EFI Fuel Performance Data

Engine Specifications



**BLAST™**  
BOOSTED LOW SPEED TORQUE



**ECOmo**  
ECONOMY CONTROLLED MOTOR

**5 YEAR WARRANTY**  
HONDA MARINE

Model:	BF60LRTL
Horsepower:	60 @ 5500 rpm
Displacement:	1.0 Litres
Weight:	110 Kgs (Dry)
Gear Ratio:	2.07:1
Mounting Height:	3rd Hole up
Prop Material (Blades):	Stainless
Prop Manufacturer:	Solas
Prop (Diameter / Pitch):	12.25 x 14

### Stacer 479 Sunmaster SVS

Boat Specifications

Length with Bow Sprit:	4.93 metres
Length:	4.85 metres
Beam:	2.2 metres
Max HP:	60 Hp
Fuel Capacity:	75 Litres
Max. Transom Weight:	157 Kgs
Total Weight (as tested*):	820 Kgs

\*Total weight of boat / engine set up was measured at a public weighbridge with all persons, required safety gear and boating equipment included.

Test Conditions


No. of People:	2
Air Temperature:	15 C
Water Temperature:	13 C
Wind Velocity:	7 knots
Conditions:	Steady
Wind Direction:	E

Test Performance

Test Date:	May 22nd, 2009
Maximum Speed:	56 Kph
Best Ave. Acceleration 0-30 Km/h:	5.5 Seconds
Fuel Type:	91 Octane Unleaded

Best Kms/Litre:	4.5 K/L @ 3500 RPM(cruising)
	5.8 K/L @ 1000 RPM(Trolling)

Stacer 479 Sunmaster SVS & BF60 Average Speed & Fuel Consumption

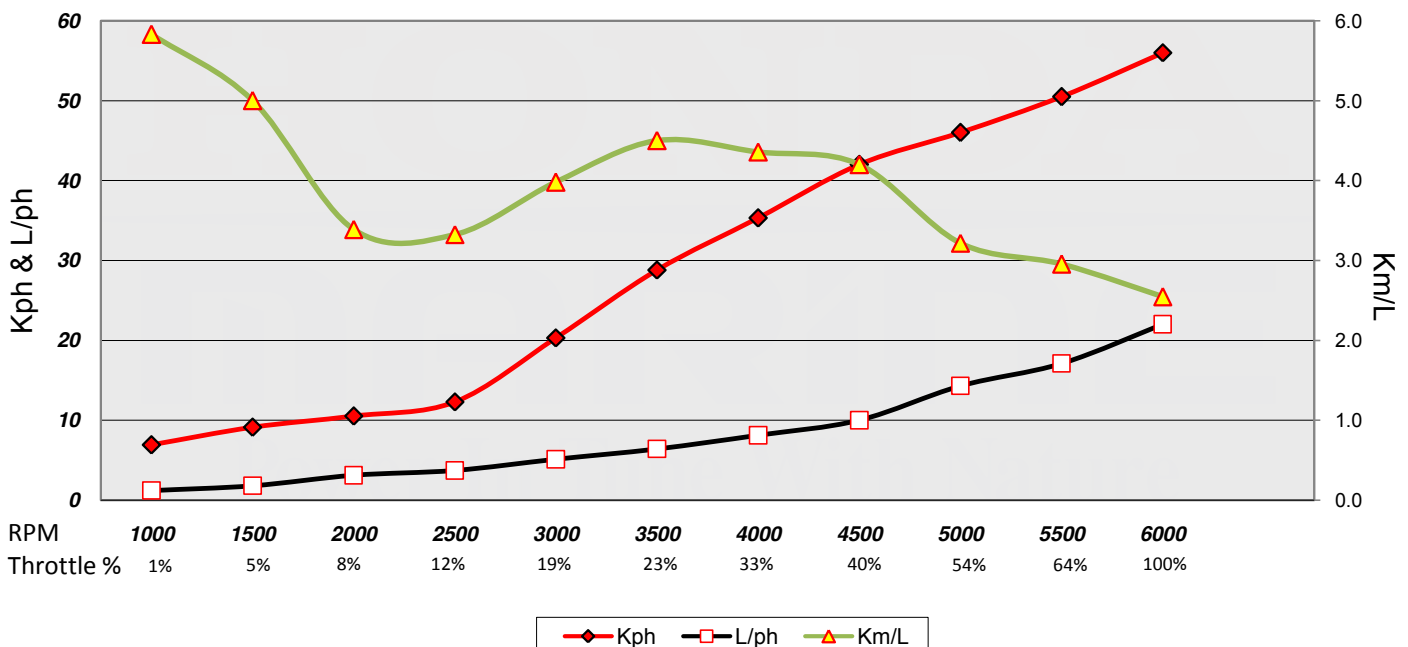

Data may vary due to changes in weather, tides, temperature, wind direction, hull & propeller condition and load conditions. Fuel data gathered with a calibrated Honda digital fuel gauge. Throttle position percentage was obtained utilising Honda's "Dr H" diagnostic software. Speed data gathered by GPS receiver. Honda Australia accepts no responsibility for the accuracy of these readings. All data is recorded with the engine trim positioned and propeller selection for best performance.